



# UFO LED High Bay lamps

**224481-224482 150W-230V-UFO**

Made By	Checked by
OK	OK

CE



ROHS



# 100W UFO LED high bay lamps

## Description:





- This product use durable and long life span LED light source, downy light, no glare, simple design.
- This product waterproof and dustproof level IP65.Can be used in various of places.
- Mainly use the aluminum alloy as the material with PC lens . Work safely and durable under different conditions.
- Adopted Philips 3030 SMD Led light source, Large-Size Chip with High brightness and low light fades, Enough Current margin, Led chip Rated current 150mA, actual use only 120mA, Extend led Lights lifespan and increase Light Efficiency.
- Adopted Meanwell Driver, Universal AC Input/Full range up to AC180-295V.
- Protection function: short circuit/over current/over voltage/over temperature, Built-in.
- active PFC function,  $PF \geq 0.9$  and Conversion efficiency  $\geq 90\%$  Fully encapsulated with IP65 Level.
- Integrated fixture structure, Air convection design for reliable lifetime.

## Applications:


- For the workshop, factory, warehouse, highway toll stations, gas stations, supermarkets, exhibition halls, stadiums and Other places of lighting required..



## Dimensions(Unit:mm):

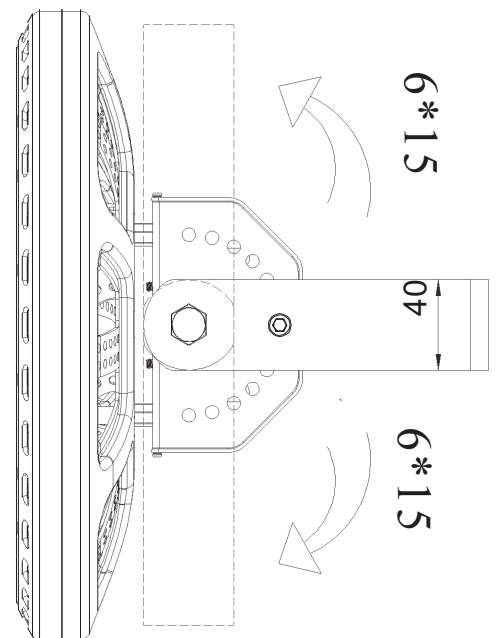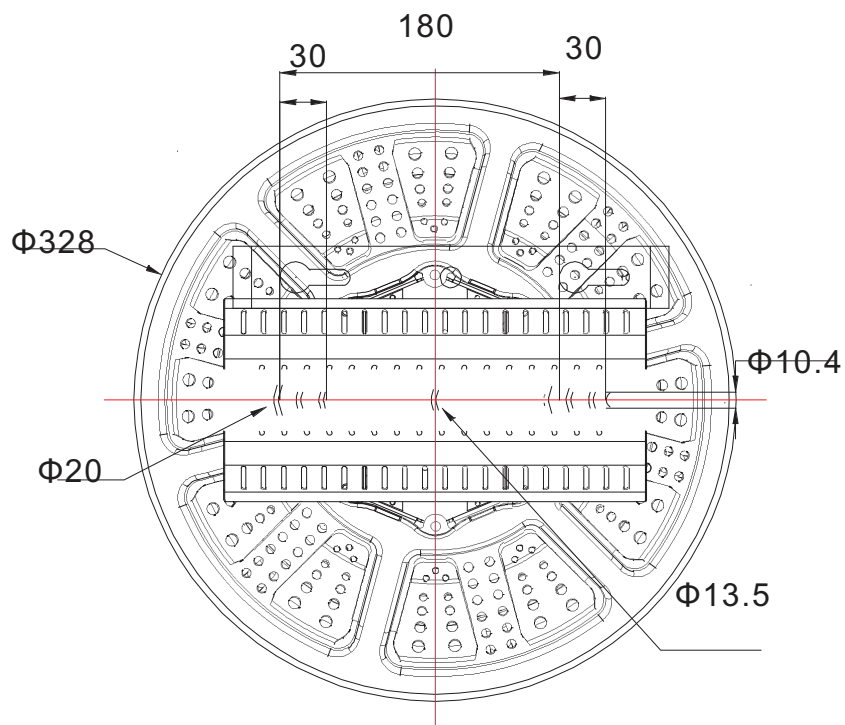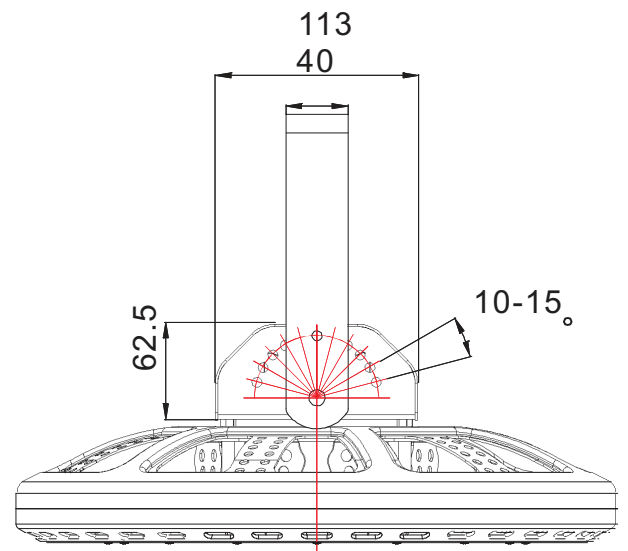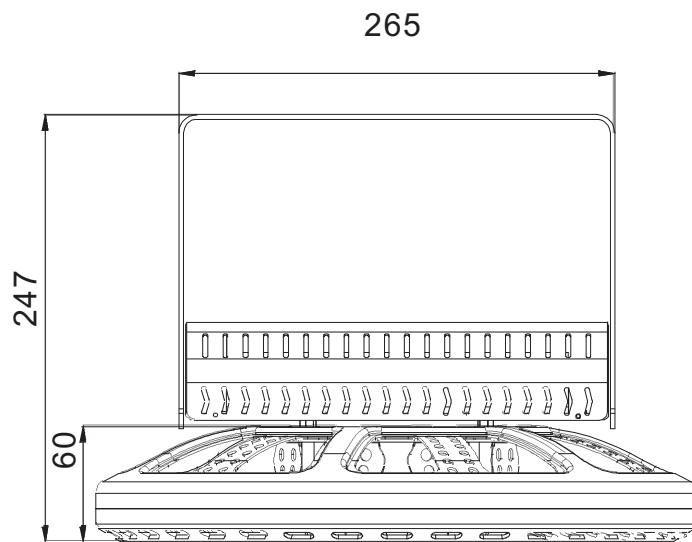

## Photos

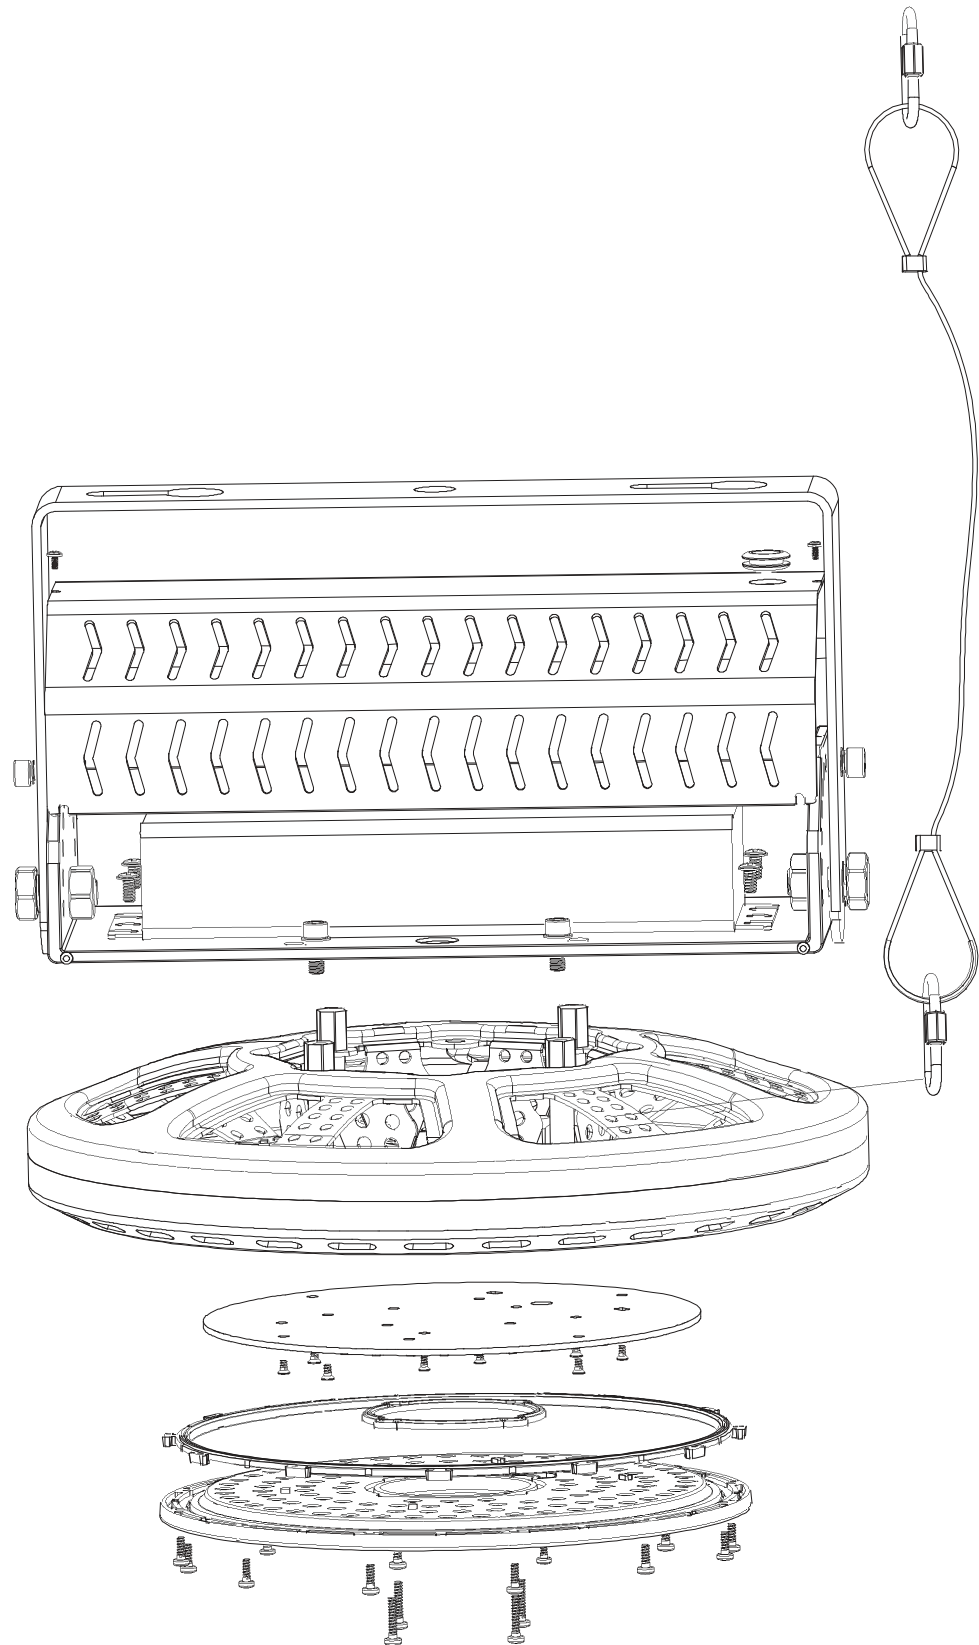

## Photos



5  
Years  
PHILIPS





## Electrical/Optical Characteristics/Specifications

### MODEL:SRHB150W-230V-UFO

Input Voltage	Max.Current	Operating Voltage	Constant Current		Power Consumption	Power Factor
AC200-240V	0.90A	DC42V	3.13A		150W	≥0.9
LED Type	LED Q'ty	CRI	CCT	2800-3200K	4000-4500K	5500-6000K
			Luminous efficiency	115LM/W	120LM/W	125LM/W
			Luminous flux	17250LM	18000LM	18750LM
			Beam Angle	120°		
Life Time	Certifications	IP Code	Luminaires Class		productdimension	N.W
30.000Hours	CE,RoHS	IP 65	Class I		Φ328*H247MM	4.0Kg
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage		Packing dimension	G.W
-20 to+50	-30 to+60	10-80%RH	10-90%RH		380*380*190MM	5.5Kg
Outer carton package	3*1layer=3PCS/carton,K=K corrugated paper, L400*W400*H615mm,GW:18.5KG					

## Packing Info

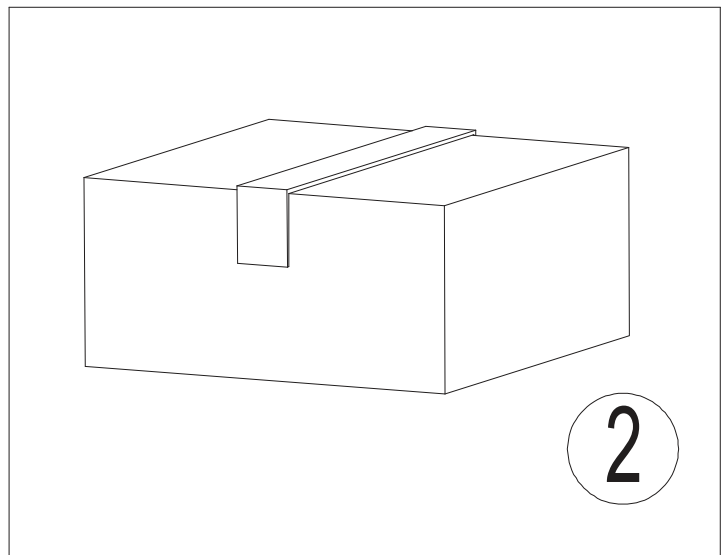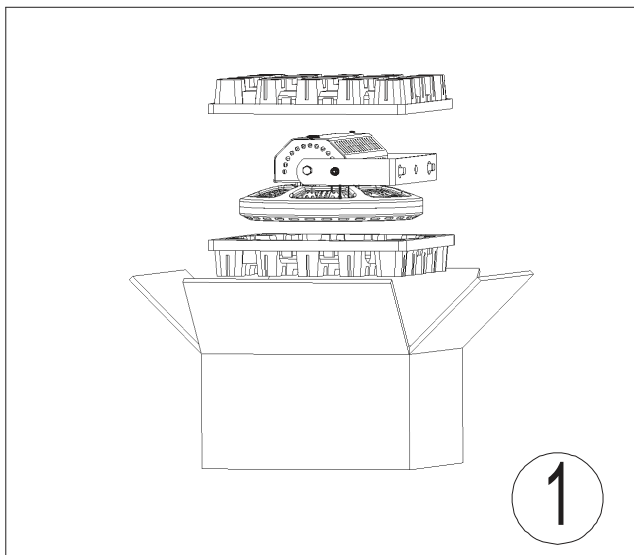

### Cautions:

- 1.This product must be installed by professionals;
- 2.If there is any damage on the power line or shell, it should be taken as defective product and should not be used;
- 3.High voltage, non-professionals are not allowed to install, disassemble the product or connect wires.