



LED TUBES

130 Lm/W

(Constant-voltage : AC100-240V)

Made By	Checked by
OK	OK

CE



Features

- ★ High brightness SMD LED,NO Infrared,UV,Mercury pollution.
- ★ 60% Energy saving, compared with conventional fluorescent tube,
- ★ 49999H lifespan, Aluminum with PC construction no potential risk of broken for transportation.
- ★ Solid light source,no potential risk to fade the color for lighting.
- ★ Optical PC diffuser with milk for option,lighting comfortable.
- ★ Warm/pure/cool white all avialble with high CRI
- ★ Quick response,no flicker and dazzle

Photo



LED TUBES SPECIFICATIONS

Size

600mm	900mm	1200mm	1500mm
-------	-------	--------	--------

Power

9W	14W	18W	22W
----	-----	-----	-----

LED Type

SMD 2835 45pcs	SMD 2835 68pcs	SMD 2835 96pcs	SMD 2835 120pcs
----------------	----------------	----------------	-----------------

brightness


1170LM	1820LM	2340LM	2860LM
--------	--------	--------	--------

N.W.


0.17KG	0.28KG	0.3KG	0.46KG
--------	--------	-------	--------

G.W.


0.20KG	0.33KG	0.36KG	0.53KG
--------	--------	--------	--------

Input Voltage	AC100-240V	Color	warm white Natural white Pure white
Base Type	G13 (Rot  le)		
Rendering Index	>80	View Angle	300°
LED'S Operating Life	49, 999Hours	Material	Aluminium+PC
Operating Temperature	-20°C – +45°C	Storage Temperature	-30°C +65°C
Certificates	CE TUV ROHS	Color Temperature	2900-3100K 4000-4500K 5500-6000K


Dimensions

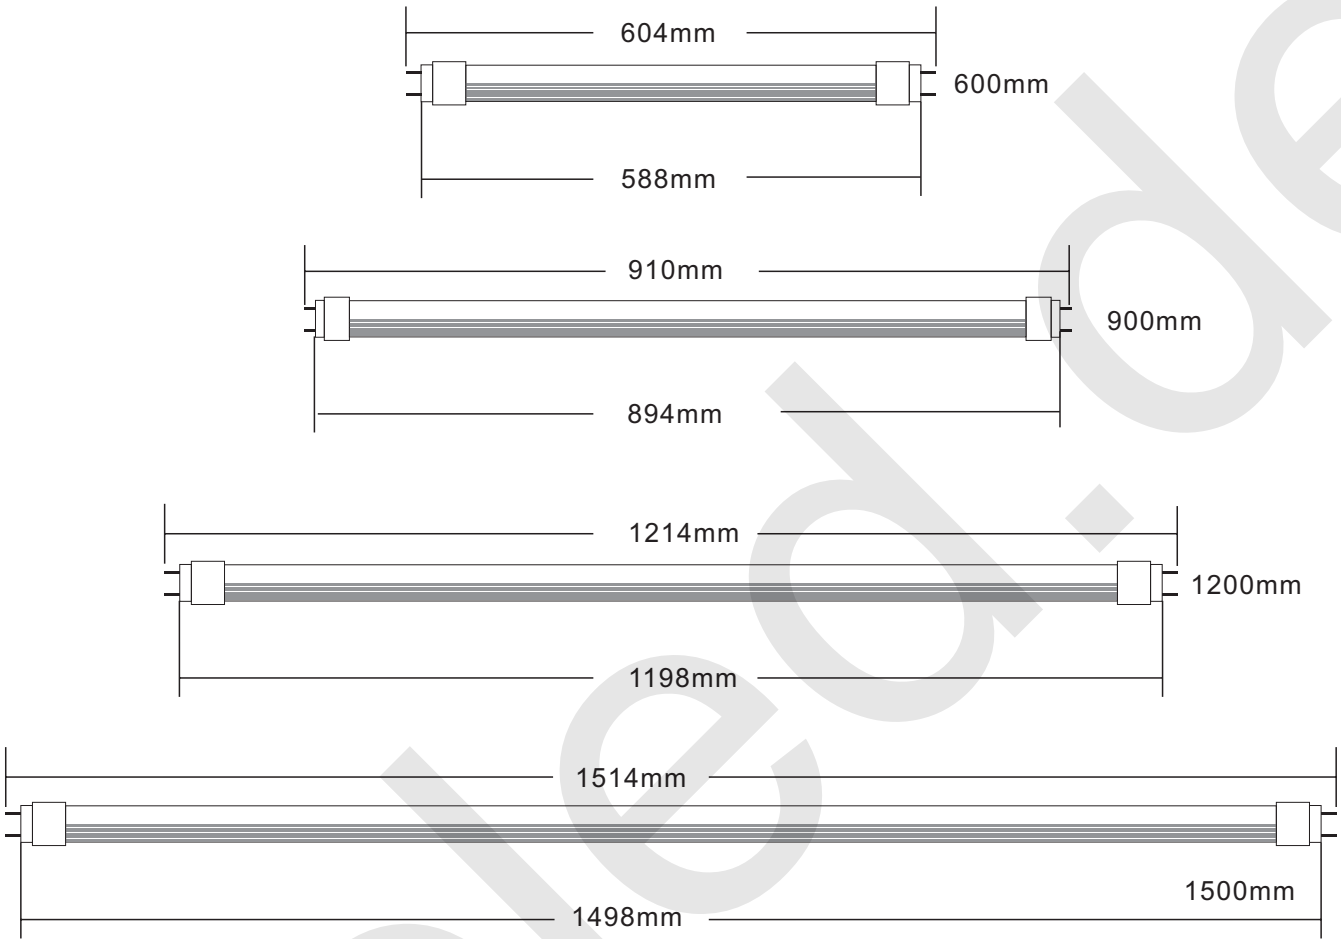


Light distribution curve

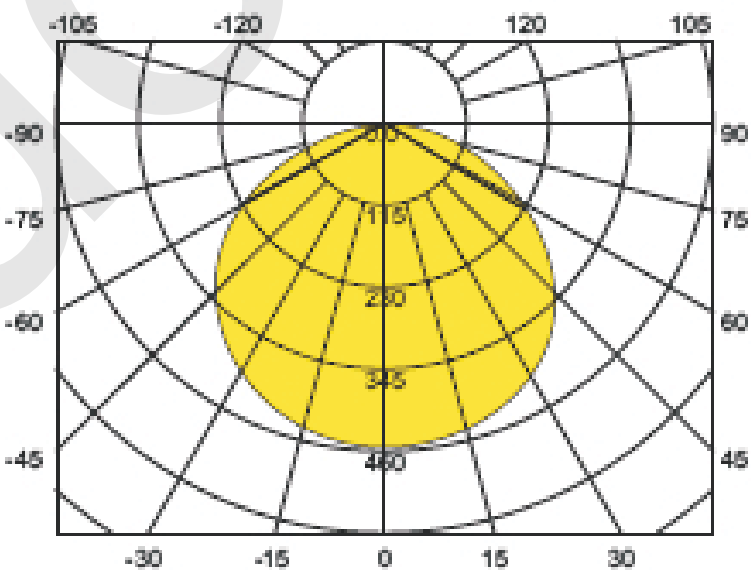

Rotary G13 Lamp holder use method




1. Put your thumb on the two pins of G13 cap, then outward gently press the rotating part of lamp holder to make the upper end to tilt outward about 2° (1mm).




2. According to the needed angle, adjust the rotating lamp holder or tube to the needed angle.

LED Tubes installation(Single-ended input)


Installation electronic Ballast

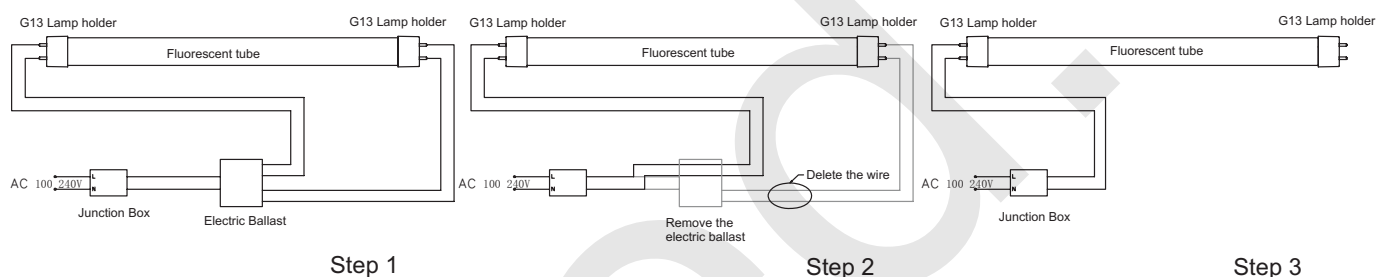

Installation Inductive Ballast

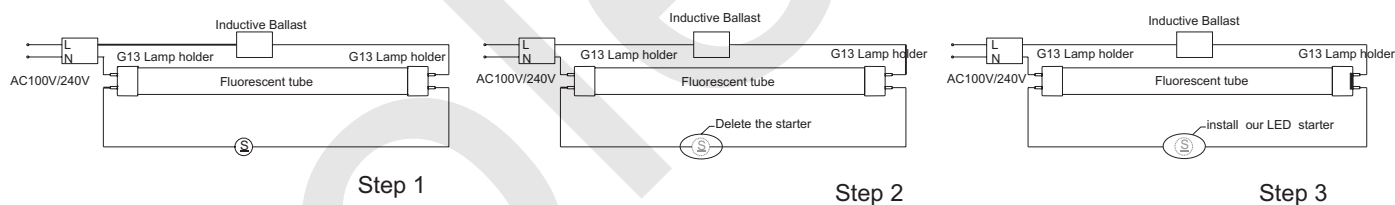

Package

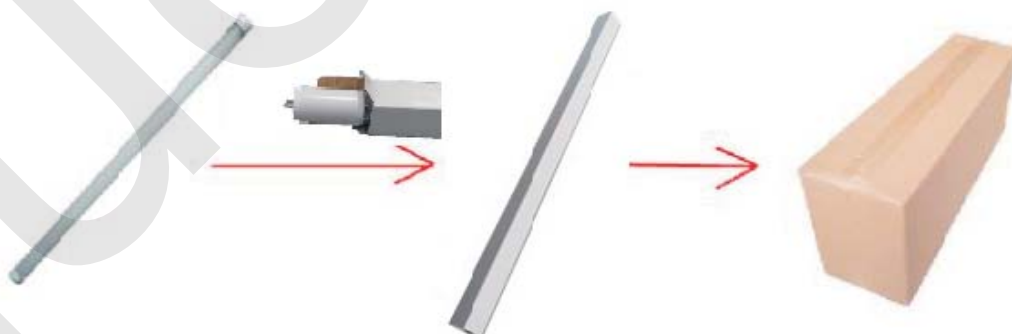

Product	Root/Box	Product	Root/Box
600mm	100root/Box	1200mm	50root/Box
900mm	50root/Box	1500mm	50root/Box