



LED Flutlicht

ultraslim

Art. Nr.

224000-224005

(Constant-voltage:AC220-240V)

Made By	Checked by
OK	OK


CE




Features

- ★ High brightness 2835 LED,NO Infrared,UV,Mercury pollution.
- ★ 60% Energy saving, compared with conventional halogen lamp.
- ★ 49999H lifespan, Aluminum with PC construction no potential risk of broken for transportation.
- ★ Solid light source,no potential risk to fade the color for lighting.
- ★ Optical PC diffuser ,lighting comfortable.
- ★ Warm/pure/cool white all avialble with high CRI
- ★ Quick response,no flicker and dazzle

Photo

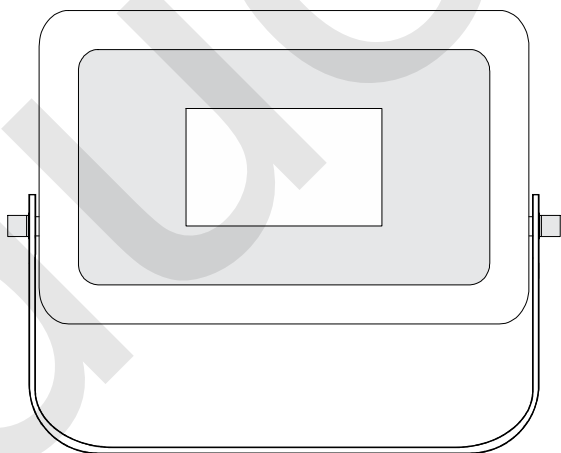

White

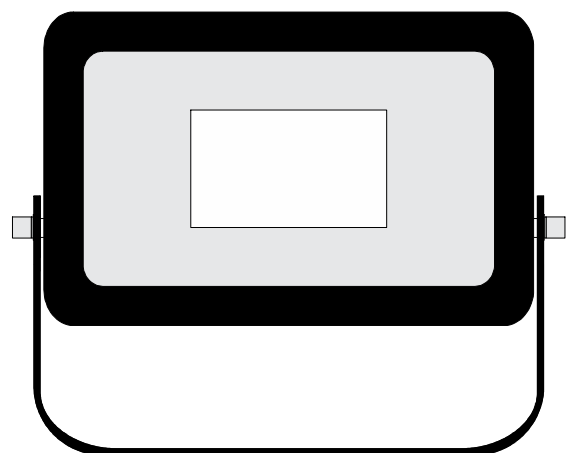

Black

LED FLOODLIGHT SPECIFICATIONS

Size

132*196*28mm	205*135*39mm	255*160*49mm
--------------	--------------	--------------

Power

10W	30W	50W
-----	-----	-----

LED Type

2835 24 pcs	2835 72 pcs	2835 104 pcs
-------------	-------------	--------------

brightness

1100LM	3300LM	5500LM
--------	--------	--------

N.W.

0.42KG	0.85KG	1.36KG
--------	--------	--------



G.W.

0.43KG	0.88KG	1.41KG
--------	--------	--------



Input Voltage	AC220-240V	Color	warm Natural Pure
Base Type	L/N-Wire		
Rendering Index	>80	View Angle	120°
LED'S Operating Life	49,999Hours	Material	Aluminium+PC
Operating Temperature	-20°C – +45°C	Storage Temperature	-30°C +65°C
Certificates	CE TUV ROHS	Color Temperature	2600-2800K 4000-4500K 5500-6000K

Dimensions



50W

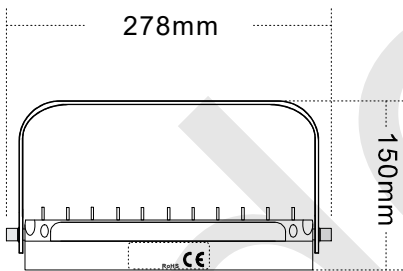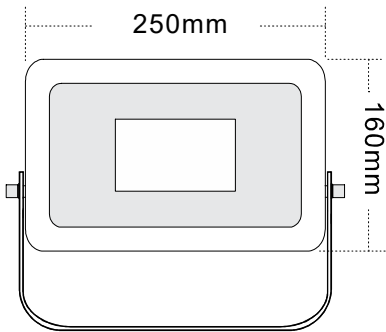



30W





10W




Light distribution curve

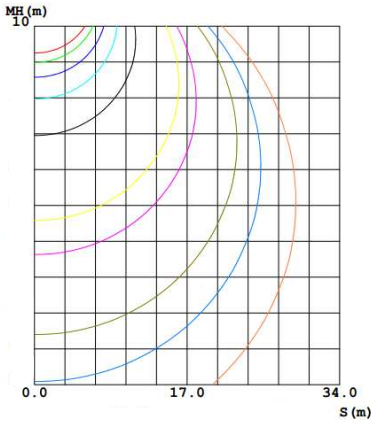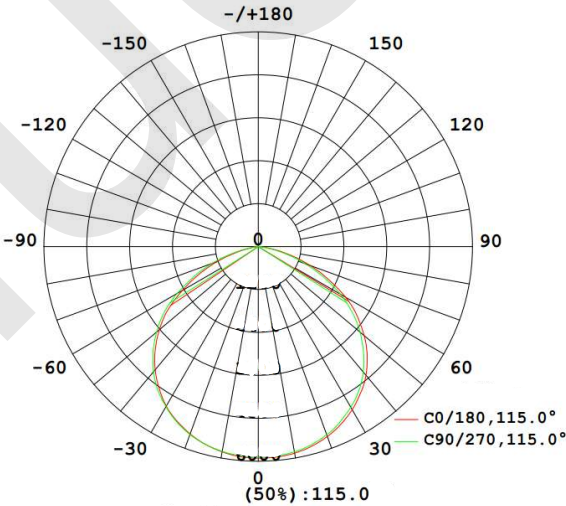

Track head holder use method

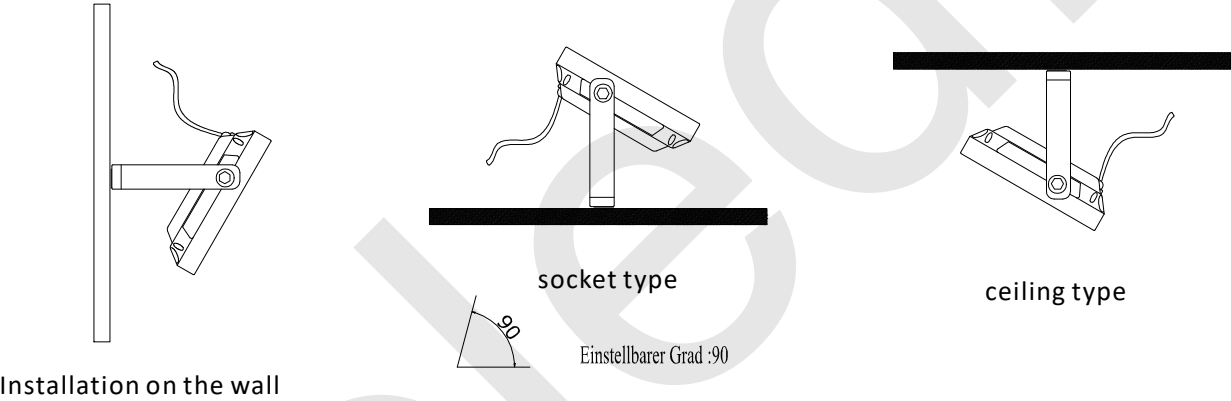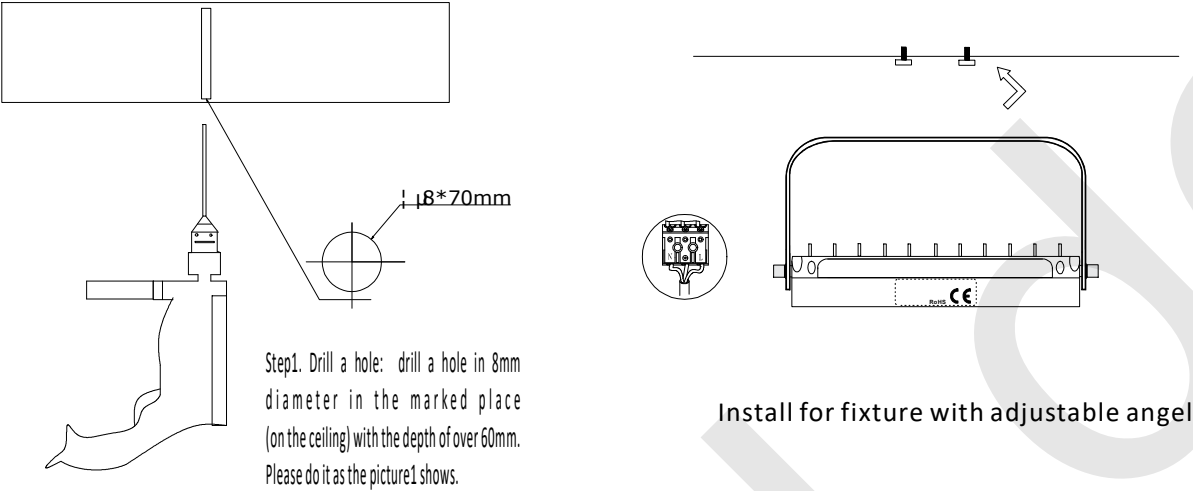

Package

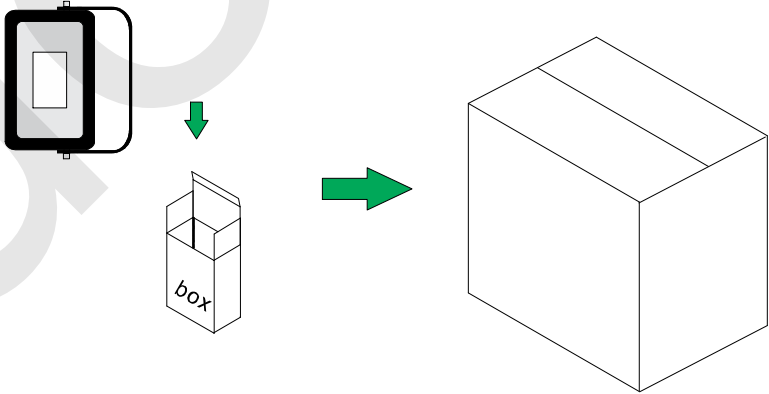

Product	Box/Carton	Product	Box/Carton	Product	Box/Carton
10W	60 box/Carton	30W	30 box/Carton	50W	20 box/Carton

Notice

Installation information:

Power must be cut off before installation, fix it on the position of installation holes, connection of the power supply must be sealed.

1. Please read the specification first, to make sure the service environment matches the condition in the specification before using.
2. Please confirm the applicable power supply before using.
3. Make sure the switch of product is off before connect to the power supply to prevent electric shock.
4. Operation against rules may damage your property even harm to your personal safety.
5. Preliminarily estimate required quantity of LED lights, then according to the power rating of single flood light to figure out the total power and design power supply plan.
6. Dangerous high voltage, Non-professionals are not allowed to maintain the products.

If the exterior flexible cable or wire is damaged, it must exchange by the supplier, its agent or other similar qualified personnels to avoid dangers.