

DUOLED


TRI-PROOF LED LIGHT




Dimension: 1560x130x85mm

ITEM	DESCRIPTION
Power consumption	45W - 60W
Input Voltage	AC 85-265V
Operating Voltage	DC 36-40V
Power Factor	0.95
Driver Efficiency	>90%
THD	<15% at full load
LED Type	SMD 2835(0.2w/pc, passed LM-80 6000Hours)
LED Q'ty	240 - 324 PCS
LED Chip Brand	Epistar
Lumen	5500lm±5%(milky cover) 5700lm±5%(clear cover)
CCT	4200K
Beam Angle	120°
CRI	>80Ra
Life time	50,000 H
Certification	CE RoHS
IP Code	IP65
Luminaires Class	Class III
Operating Temperature	-20°C ~60°C
Max Operation Height	5m
Housing	PC+PC(Not ABS+ABS)
Net Weight	2.70kg/pc
Packaging	6pc/ctn, ctn size: 164*31*32cm, 16.70kg/ctn


CO PLANE ISOLUX DIAGRAM(UNIT: 1x)

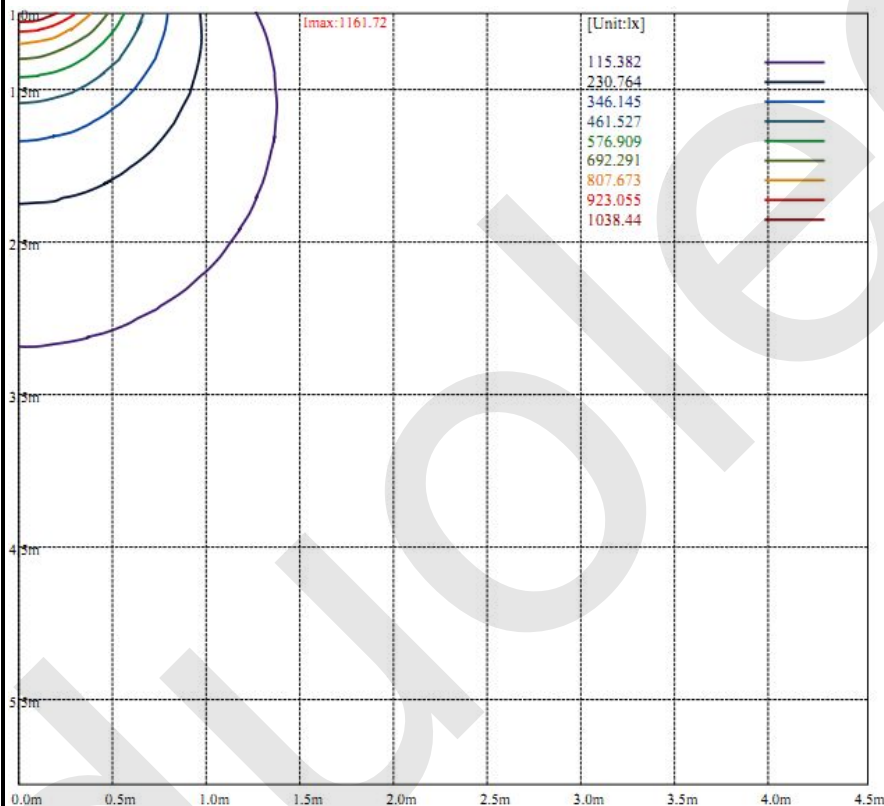

LUMINOUS INTENSITY DISTRIBUTION

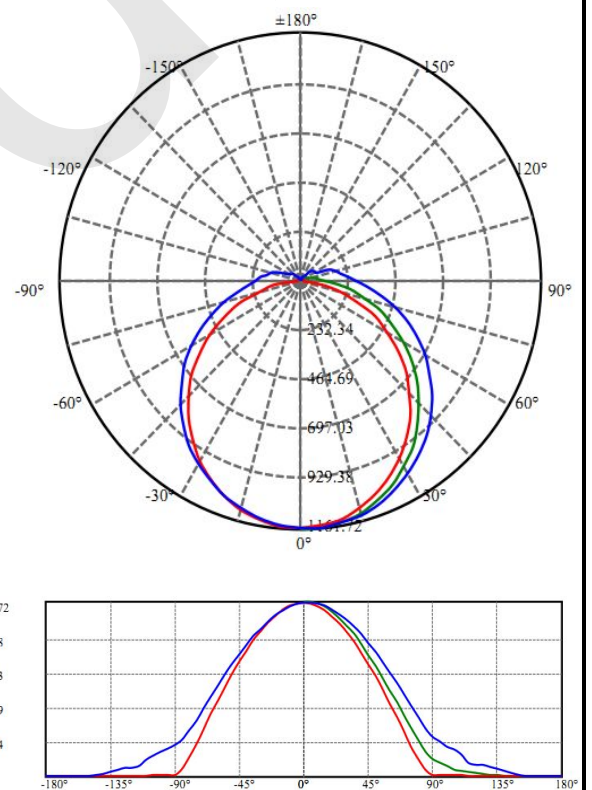

LUX DISTANCE CURVE

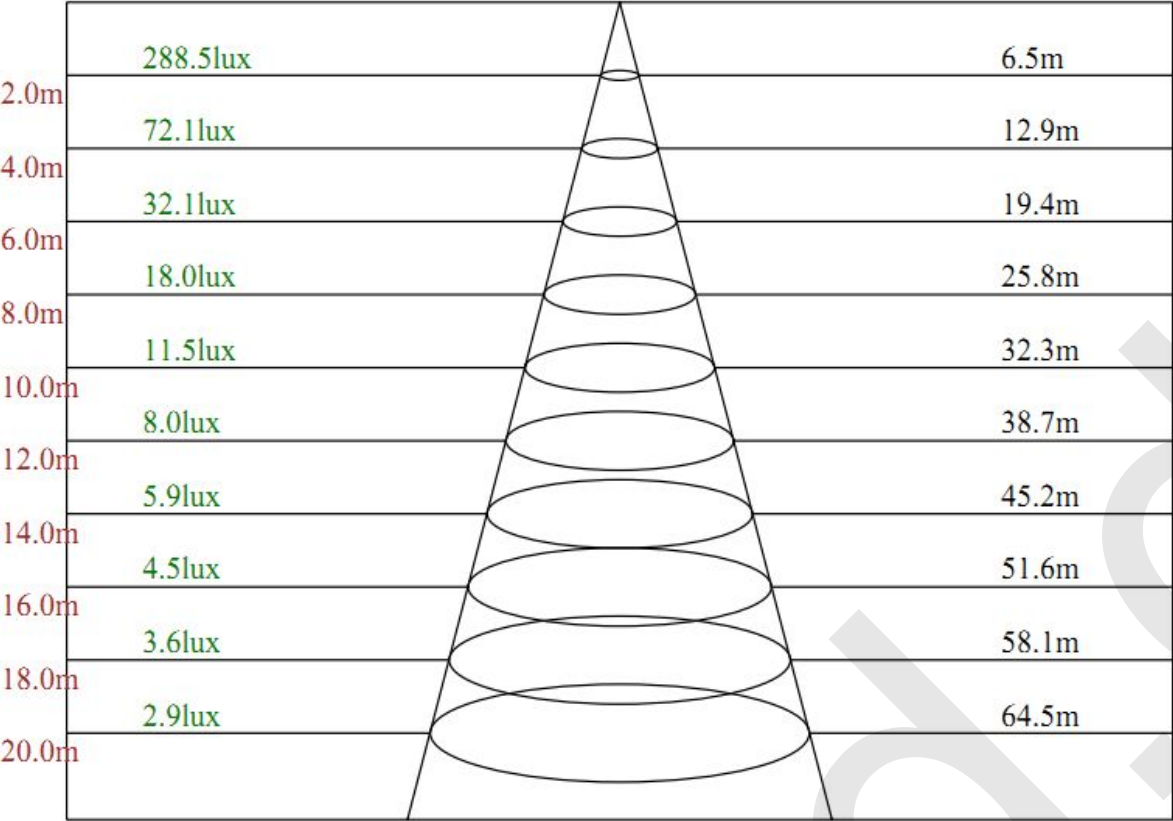

Beam angle of C30plane1 16.26