



LED TriProof Wannenleuchte (2835)

(Constant-voltage : AC100-240V)

Made By	Checked by
OK	OK

CE



Features

- ★ High brightness SMD LED,NO Infrared,UV,Mercury pollution.
- ★ 60% Energy saving, compared with conventional fluorescent tube,
- ★ 29999H lifespan, PC construction no potential risk of broken for transportation.
- ★ Solid light source,no potential risk to fade the color for lighting.
- ★ Optical PC diffuser with milk for option,lighting comfortable.
- ★ Warm/pure/cool white all avialble with high CRI
- ★ Quick response,no flicker and dazzle

Photo



LED Waterproof Luminaire

Size

600mm	1200mm	1500mm
-------	--------	--------

Power

20W	36W	55W
-----	-----	-----

LED Type

SMD 2835 144pcs	SMD 2835 288pcs	SMD 2835 360pcs
-----------------	-----------------	-----------------

brightness

1800LM	3240LM	4950LM
--------	--------	--------

N.W.


0.82KG	1.50KG	1.70KG
--------	--------	--------

G.W.


0.98KG	1.73KG	2.15KG
--------	--------	--------

Input Voltage	AC100-240V	Color	warm white Natural white Pure white
Base Type	AC wire		
Rendering Index	>80	View Angle	120°
LED'S Operating Life	50000Hours	Material	PC
Operating Temperature	-20°C – +35°C	Storage Temperature	-30°C +65°C
Certificates	CE TUV ROHS	Color Temperature	2800-3200K 4000-4500K 5500-6000K


Dimensions

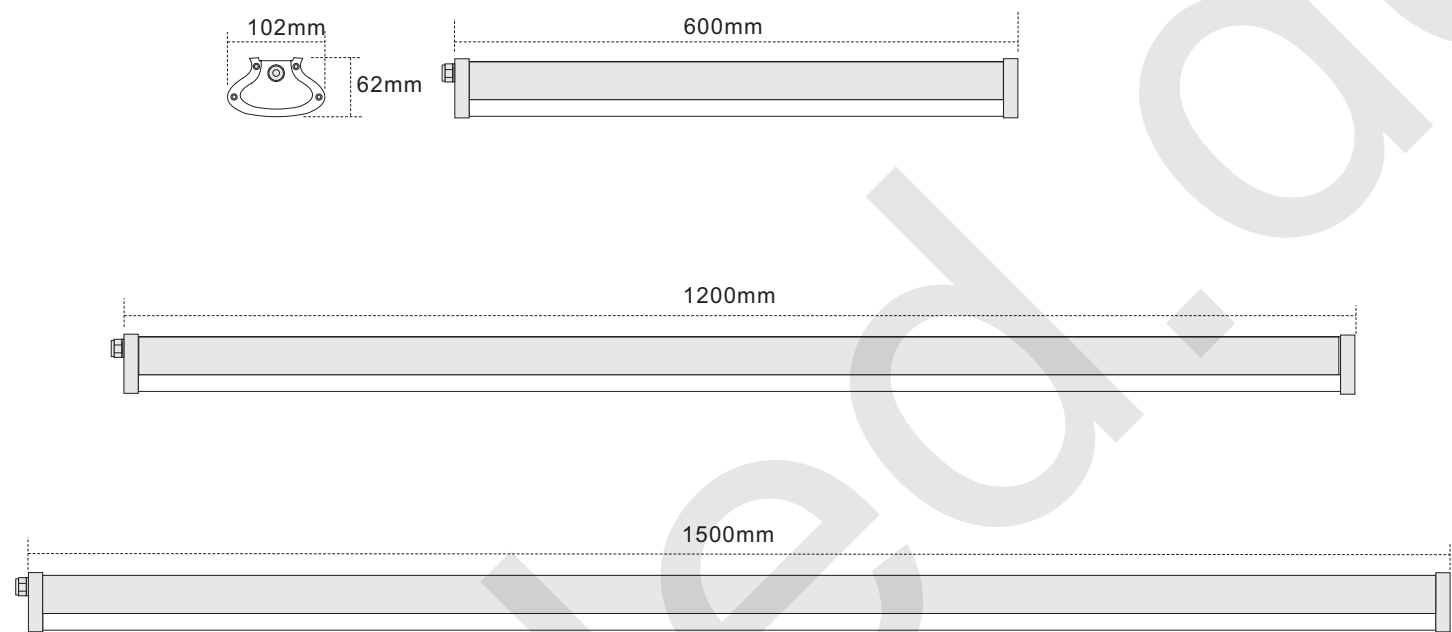


Light distribution curve

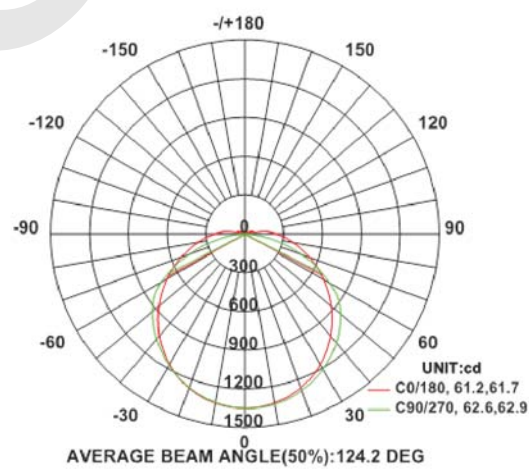

LED Waterproof Luminaire installation

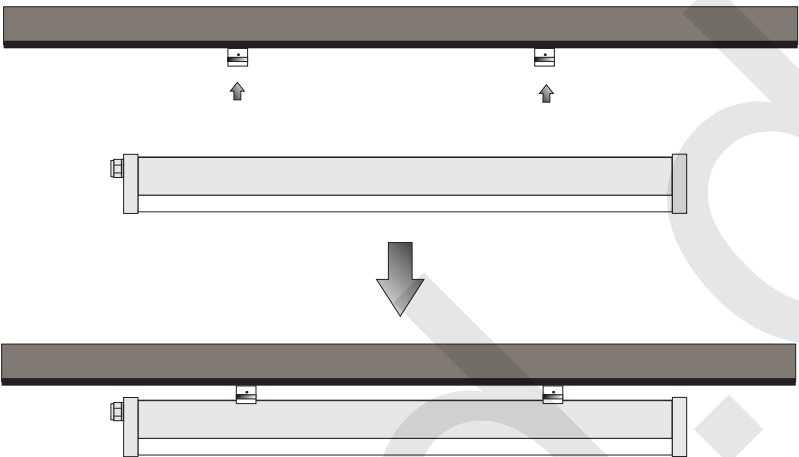

Package

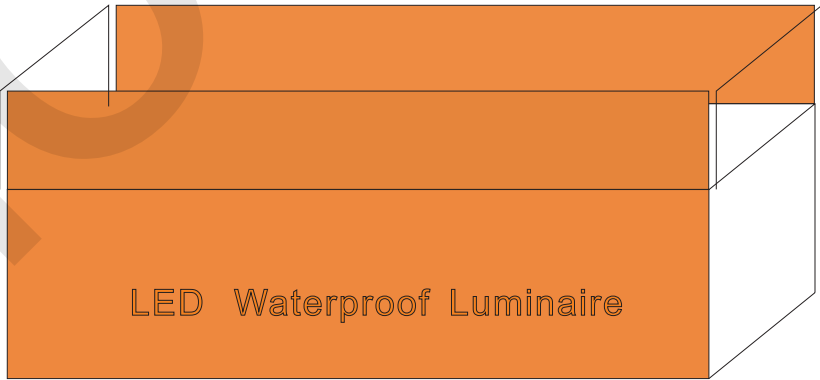

Product	Root/Box	Product	Root/Box
600mm	12root/Box	1200mm	12root/Box
900mm	12root/Box	-----	-----

Notice

Installation information:

Power must be cut off before installation, fix it on the position of installation holes, connection of the power supply must be sealed.

1. Please read the specification first, to make sure the service environment matches the condition in the specification before using.
2. Please confirm the applicable power supply before using.
3. Make sure the switch of product is off before connect to the power supply to prevent electric shock.
4. Operation against rules may damage your property even harm to your personal safety.
5. Preliminarily estimate required quantity of LED lights, then according to the power rating of single flood light to figure out the total power and design power supply plan.
6. Dangerous high voltage, Non-professionals are not allowed to maintain the products.

If the exterior flexible cable or wire is damaged, it must exchange by the supplier, its agent or other similar qualified personnels to avoid dangers.