



LED RÖHREN SAMSUNG

5730

Highlumen 140Lm/W

(Constant-voltage : AC100-240V)

Made By	Checked by
OK	OK

CE



Features

- ★ High brightness SMD LED,NO Infrared,UV,Mercury pollution.
- ★ 60% Energy saving, compared with conventional fluorescent tube,
- ★ 49999H lifespan, Aluminum with PC construction no potential risk of broken for transportation.
- ★ Solid light source,no potential risk to fade the color for lighting.
- ★ Optical PC diffuser with milk for option,lighting comfortable.
- ★ Warm/pure/cool white all avialble with high CRI
- ★ Quick response,no flicker and dazzle

Photo



LED TUBES SPECIFICATIONS

Size

600mm	900mm	1200mm	1500mm
-------	-------	--------	--------

Power

9W	14W	18W	25W
----	-----	-----	-----

LED Type

SMD 5730 52pcs	SMD 5730 85pcs	SMD 5730 120pcs	SMD 5730 150pcs
----------------	----------------	-----------------	-----------------

brightness


1260LM	1960LM	2520LM	3500LM
--------	--------	--------	--------

N.W.


0.17KG	0.28KG	0.3KG	0.46KG
--------	--------	-------	--------

G.W.


0.20KG	0.33KG	0.36KG	0.53KG
--------	--------	--------	--------

Input Voltage	AC100-240V	Color	warm white Natural white Pure white
Base Type	G13 (Rot  le)		
Rendering Index	>85	View Angle	160°
LED'S Operating Life	69, 999Hours	Material	Aluminium+PC
Operating Temperature	-20°C – +45°C	Storage Temperature	-30°C +65°C
Certificates	CE TUV ROHS	Color Temperature	2900-3100K 4000-4500K 5500-6000K


Dimensions

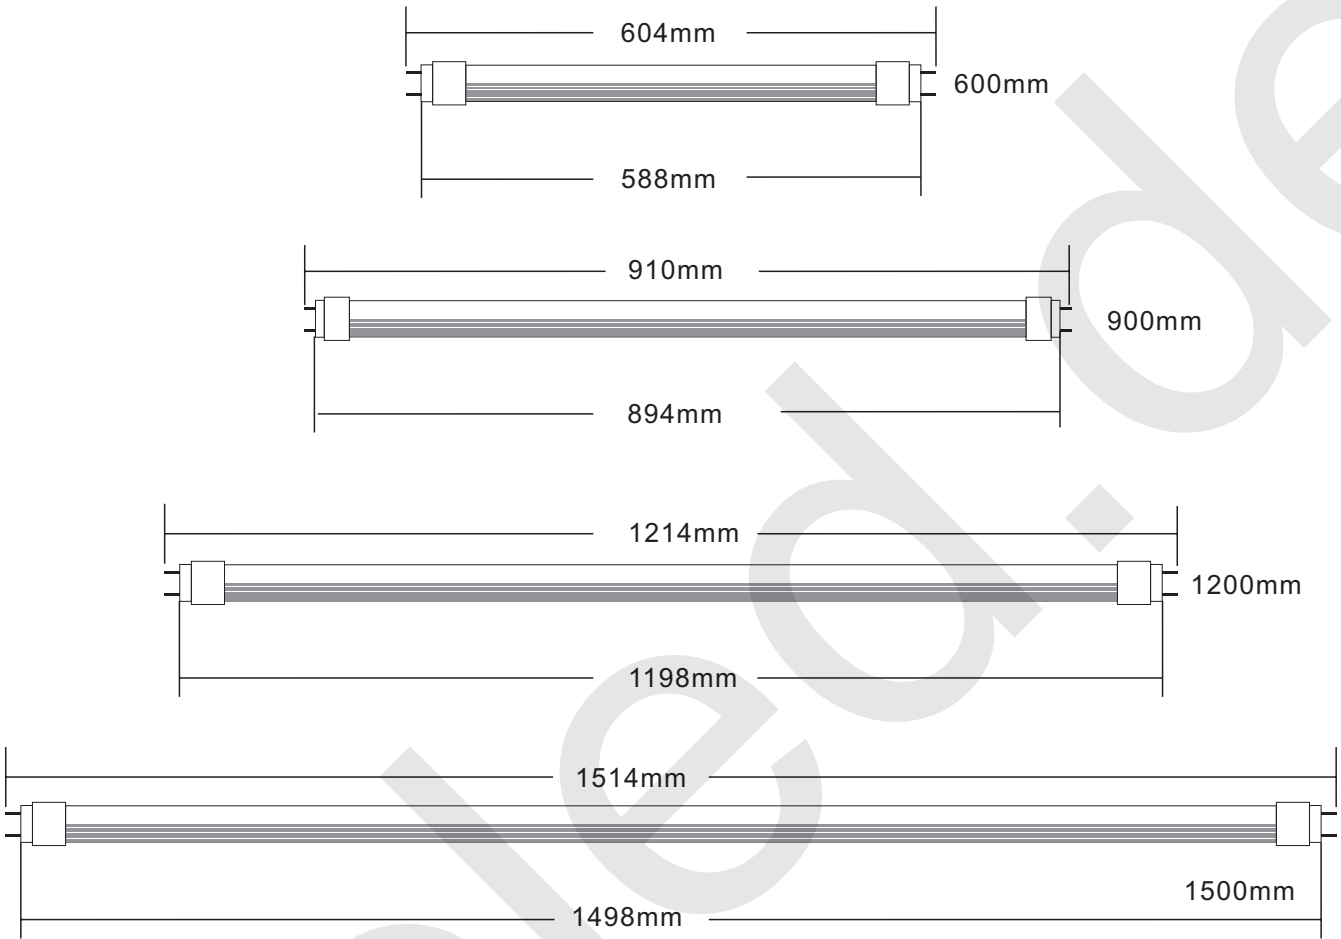

Light distribution curve

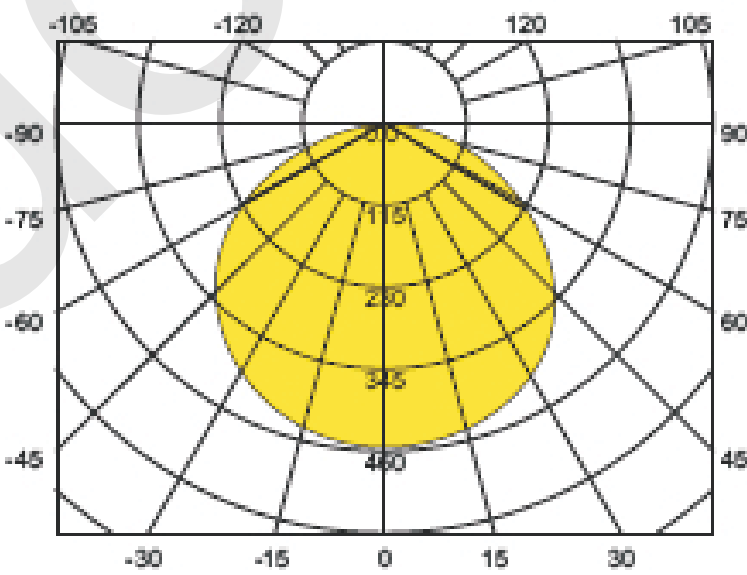

Rotary G13 Lamp holder use method

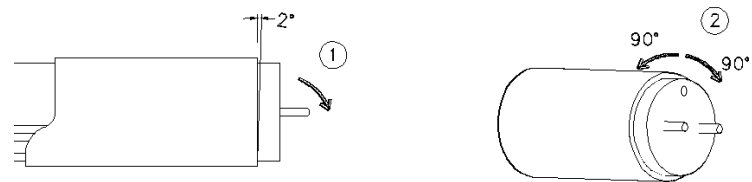


1. Put your thumb on the two pins of G13 cap, then outward gently press the rotating part of lamp holder to make the upper end to tilt outward about 2 °(1mm).


2. According to the needed angle, adjust the rotating lamp holder or tube to the needed angle.

LED Tubes installation(Single-ended input)


Installation electronic Ballast

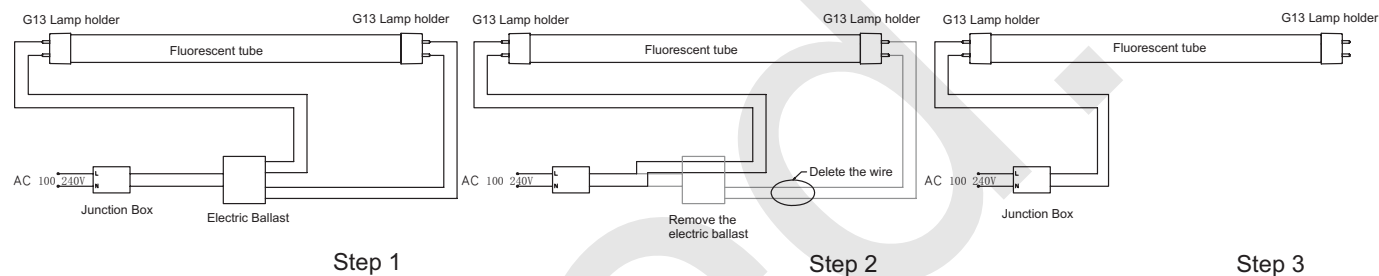

Installation Inductive Ballast

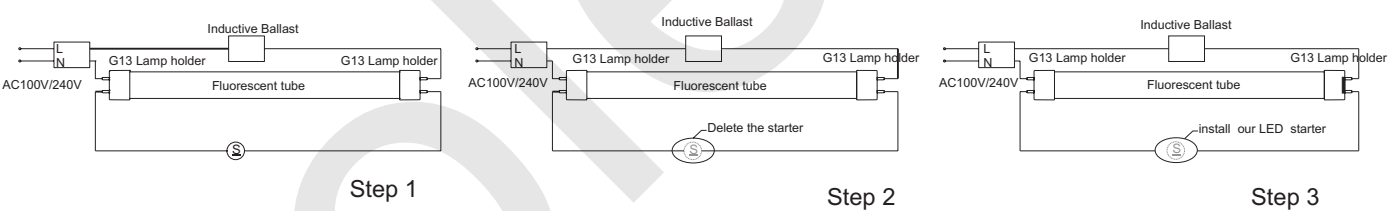

Package

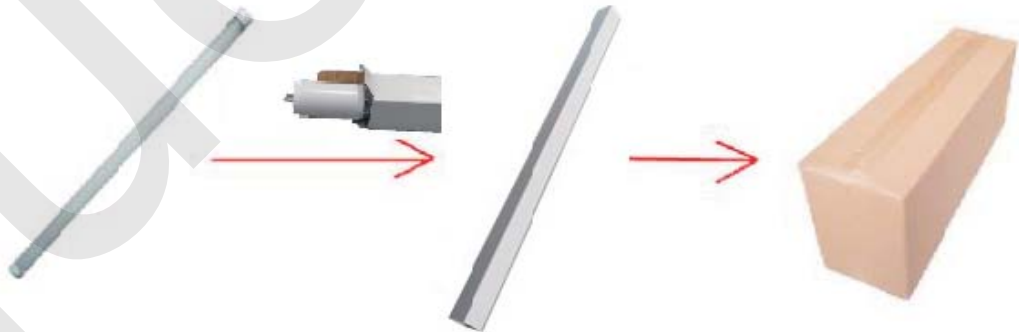

Product	Root/Box	Product	Root/Box
600mm	100root/Box	1200mm	50root/Box
900mm	50root/Box	1500mm	50root/Box